
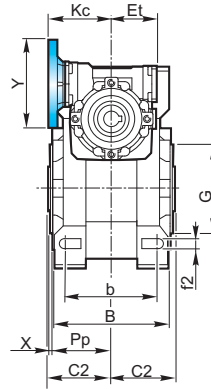


5.5 Dimensioni



5.5 Dimensions

5.5 Abmessungen


**KXC**

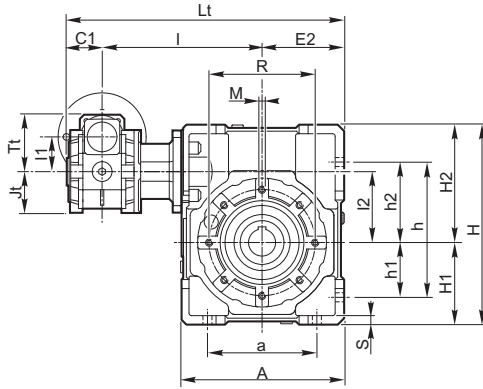



**XXA**

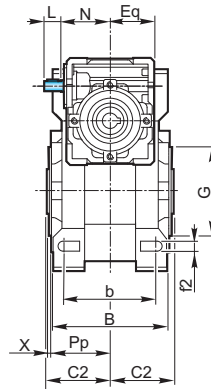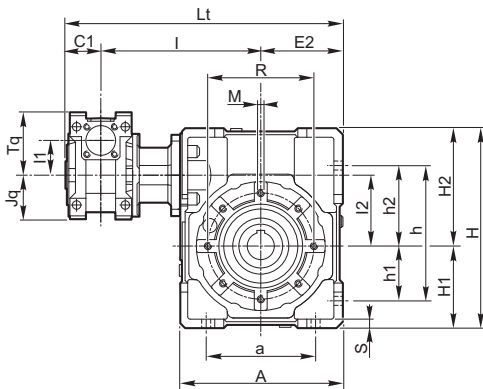


Albero entrata  
Input shaft  
Antriebswelle





**XXF**

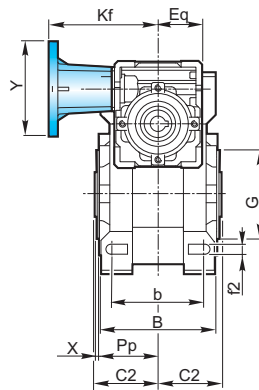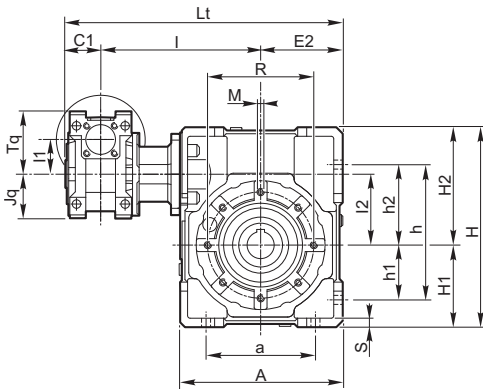

Albero uscita cavo  
Output hollow shaft  
Abtriebshohlwelle



**XXC**

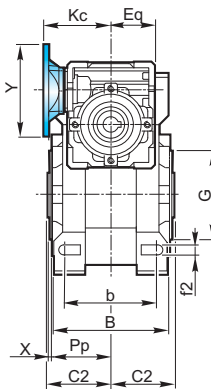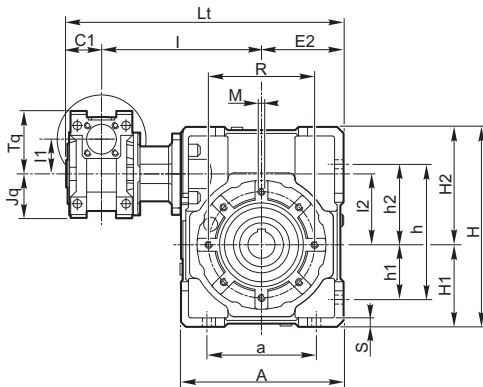


5.5 Dimensioni


5.5 Dimensions

5.5 Abmessungen


Flangia pendolare / Shaft-mounted flange / Aufsteckflansch



4 Fori / Holes / Bohrungen




4 Fori / Holes / Bohrungen



8 Fori / Holes / Bohrungen

	KXC - XXC - XXF - XXA																							
	a	A	b	be	b <sub>2</sub>	B	C <sub>1</sub>	C <sub>2</sub>	de	D <sub>2</sub> H7	Et	Eq	E <sub>2</sub>	f <sub>2</sub>	G h8	h	h <sub>1</sub>	h <sub>2</sub>	H	H <sub>1</sub>	H <sub>2</sub>			
30/30	54	80	44	3	5	—	56	31.5	31.5	14	—	41	40	40	6.5	55	71	27	44	97	40	57		
30/40	70	105	60		6	6	71		39	9	18			19	19	50	6.5	60	90	35	55	125	50	75
30/50	80	125	70		8	8	85		46	11	24			24	24	60	8.5	70	104	40	64	150	60	90
30/63	100	147	85	4	8	—	103	39	56	25	—	51	50	72	9	80	130	50	80	182	72	110		
40/63																								
40/75	120	176	90	5	8	8	112	46	60	14	28	30	60	60	86	11	95	153	60	93	219.5	86	133.5	
50/75	140	203	100	4	10	—	130	39	70	11	35	—	51	50	103	13	110	172	70	102	248.5	103	145.5	
40/90																								
50/90	170	252.5	115	5	12	—	143	46	77.5	14	42	—	60	60	127.5	14	130	210	85	125	310.5	127.5	183	
50/110																								
63/110	6	56	19	71	72																			

	KXC - XXC - XXF - XXA																				
	l	l <sub>1</sub>	l <sub>2</sub>	Jt	Jq	K <sub>c</sub>	K <sub>q</sub>	L	L <sub>t</sub>	M	Me	N	P <sub>p</sub>	R	S	Tt	Tq	Te	t <sub>2</sub>	X	
30/30	100	31.5	31.5	37.5	40	57	57	15	171.5	M6x8	M4x10	44.5	29	65	5.5	52.5	57	10.2	16.3	—	1.5
30/40	122		40						203.5	M6x10			36.5	75	6				20.8	21.8	1.5
30/50	132		50						223.5	M8x10			43.5	85	7				27.3	1.5	
30/63	145	40	63	43.5	50	75	75	20	248.5	M8x14	M4x12	57.5	53	95	8	68.5	75	12.5	28.3	—	2
40/63	150		261						M8x14	57			115	10	31.3				33.3	2	
40/75	174.5	50	75	53.5	60	82	82	25	299.5	M8x14	M5x13	67.5	57	115	10	82.5	90	16	31.3	33.3	2
50/75	190		322						M8x14	57			115	10	31.3				33.3	2	
40/90	184.5	40	90	43.5	50	75	75	20	326.5	M10x18	M4x12	57.5	67	130	12	68.5	75	12.2	38.3	—	2
50/90	200		349						M10x18	67			130	12	38.3				—	2	
50/110	226	63	110	53.5	60	82	82	25	399.5	M8x20	M5x13	67.5	74	165	14	82.5	90	16	45.3	—	2.5
63/110	236		419.5						M8x20										74	165	14





5.5 Dimensioni



5.5 Dimensions

5.5 Abmessungen



KKC\_A

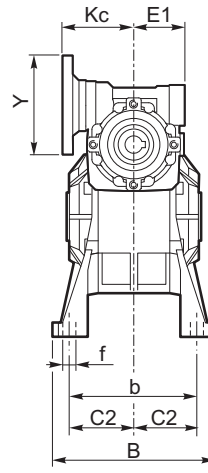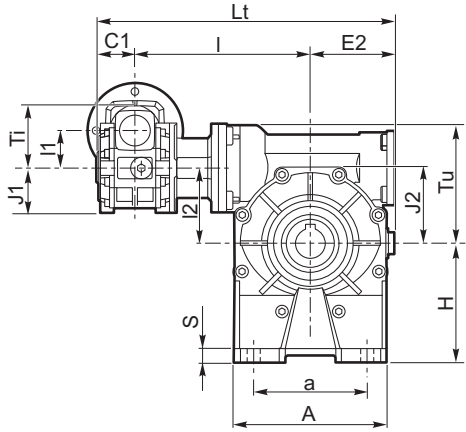




KKC\_B

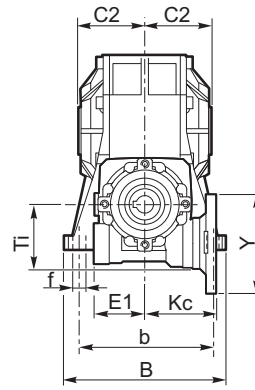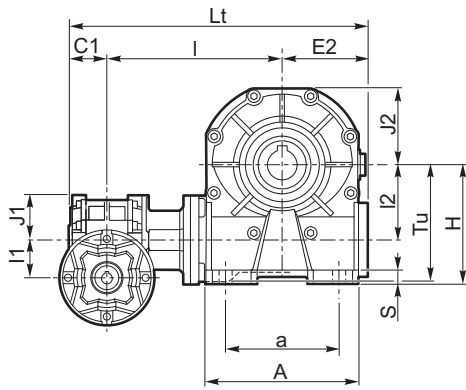

KKC\_V

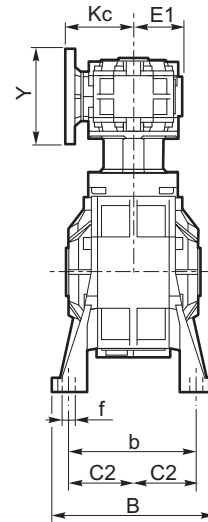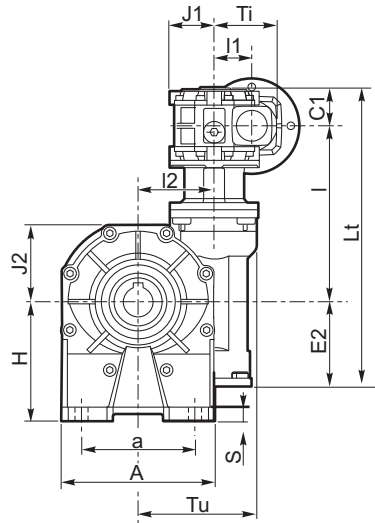

KKC\_P

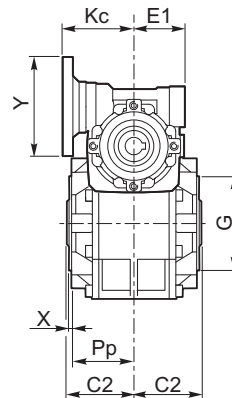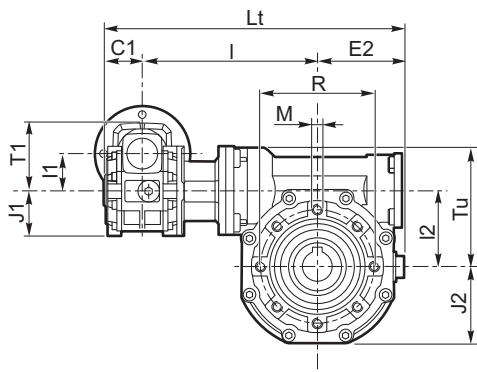


Albero uscita cavo  
Output hollow shaft  
Abtriebs-Hohlwelle

5.5 Dimensioni


5.5 Dimensions

5.5 Abmessungen


Flangia pendolare / Shaft-mounted flange / Aufsteckflansch



4 Fori / Holes / Bohrungen




4 Fori / Holes / Bohrungen



8 Fori / Holes / Bohrungen

	KKC																					
	A		a		B		b		f		H		S		b <sub>2</sub>	C <sub>1</sub>	C <sub>2</sub>	D <sub>2</sub> H7	E <sub>1</sub>	E <sub>2</sub>	G h8	
	1	2	1	2	1	2	1	2	1	2	1	2	1	2								
30/30	67		40-52		78		66		6.5		52	55	5	8	5	—	31.5	14	—	41	55	
30/40	86.5		70	52	98		84	81	7	8.5	71	72	6	6	6	6	39	18	19	41	51	60
30/50	106		63-85		119		99		9		85	82	8	8	8	8	46	25	24	41	60	70
30/63	127.5		95		136		111		11		100		8	—	—	—	56	—	—	51	71	80
40/63																	39					
40/75	155.5		120		140		115		11		115		8	—	—	—	60	28	—	60	85	95
50/75																	46	(30)				
40/90	190		140		168		140	146	13	11	135	142	10	—	—	39	70	35	—	51	103	110
50/90																	46			60		
50/110	250		200		210		162	181	13	13	171	170	12	—	—	—	77.5	42	—	71	127.5	130
63/110																	56					


	KKC														
	I	I <sub>1</sub>	I <sub>2</sub>	J <sub>1</sub>	J <sub>2</sub>	K <sub>c</sub>	L <sub>t</sub>	M	P <sub>p</sub>	R	T <sub>i</sub>	T <sub>u</sub>	t <sub>2</sub>	X	
30/30	100		31.5		37.5		171.5	M6x8	29	65				1.5	
30/40	122	31.5	40	37.5	43.5	57	203.5	M6x10	36.5	75	52.5		52.5	16.3	—
30/50	132		50		53.5		223.5	M8x10	43.5	85		82.5	20.8	21.8	1.5
30/63	145		63		64		248.5	M8x14	53	95		100.5	28.3	—	2
40/63	150	40		43.5		75	261				68.5				
40/75	176.5		75		78		301.5	M8x14	57	115		116.5	31.3	—	2
50/75	192	50		53.5		82	324				82.5				
40/90	186.5	40	90	43.5	100	75	328.5	M10x18	67	130	68.5				
50/90	202						53.5					82	351		131.5
50/110	226	50	110	53.5	122	82	399.5	M8x20	74	165	82.5				
63/110	236						64					97	419.5		161.5



Flangia uscita


Output flange

Abtriebsflansch

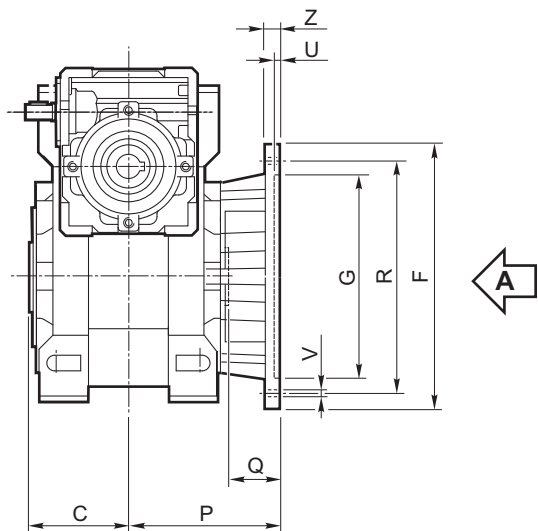



Vista da A / View from A / Ansicht von A

30/30
F1
—
—



30/30



30/40	30/50
F1	F1
F2	—
—	—



30/40	30/50
—	—
—	F2
F3	—

30/40 - 30/50



30/63	40/75
40/63	50/75
F1	F1
F2	—
—	—



30/63	40/75
40/63	50/75
—	—
—	F2
F3	—


30/63 - 40/63 - 40/75 - 50/75

40/90	50/110
50/90	63/110
—	F1
—	—
—	—



40/90	50/110
50/90	63/110
F1	—
F2	F2
F3	—

40/90 - 50/90 - 50/110 - 63/110

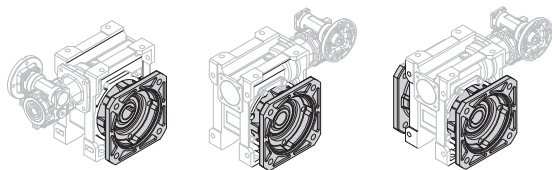

F..D Standard

F..S

F..2



KX XX KK	Tipo Type Typ	C	F		G H8	P	Q	R	U	V			Z
												∅	
30/30	F1	31.5		66	50	54.5	23	68	4	n* 4		6.5	6
	F2												
	F3												
30/40	F1	39		85	60	67	28	75-90	4	n* 4		9	8
	F2			85	60	97	58	75-90	4	n* 4		9	8
	F3			140	95	80	41	115	5		n* 7	9	10
30/50	F1	46		94	70	90	44	85-100	5	n* 4		11	10
	F2			160	110	89	43	130	5		n* 7	11	11
	F3												
30/63 40/63	F1	56		142	115	82	26	150	5	n* 4		11	11
	F2			142	115	112	56	150	5	n* 4		11	11
	F3			160	110	80.5	24.5	130	5	n* 4		11	12
40/75 50/75	F1	60		160	130	111	51	165	5	n* 4		13	12
	F2			160	110	90	30	130	6	n* 4		11	13
	F3												
40/90 50/90	F1	70		200	152	111	41	175	5	n* 4		13	12
	F2			200	152	151	81	175	5	n* 4		13	13
	F3			200	130	110	40	165	6	n* 4		11	11
50/110 63/110	F1	77.5		260	170	131	53.5	230	6		n* 8	13	15
	F2			250	180	150	72.5	215	5	n* 4		15	16
	F3												

5.5 Dimensioni

5.5 Dimensions

5.5 Abmessungen

Flangia entrata / Input flange / Antriebsflansch

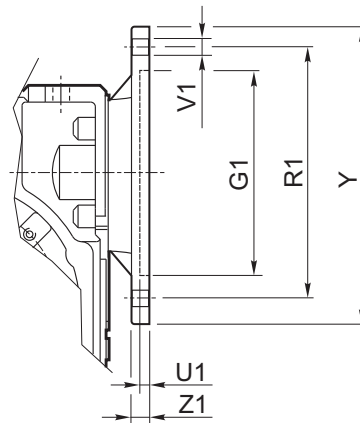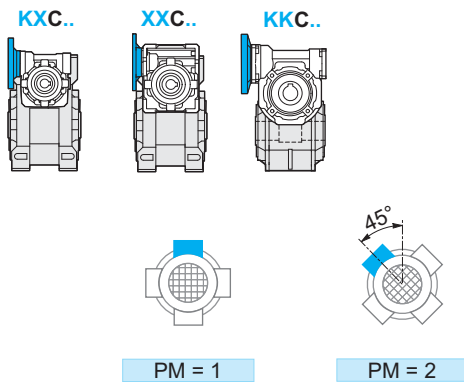

KXC XXC KKC	IEC	G <sub>H7</sub>	PM		R <sub>1</sub>	U <sub>1</sub>	V <sub>1</sub>			Y	Z <sub>1</sub>	Diametro fori PAM / Holes diameter IEC Bohrungsdurchmesser IEC														
			1	2			∅						150	200	300	450	600	900	1200	1500	1950	2500	3250	4000	5000	10000
30/30 30/40 30/50 30/63	56 B5	80	●	●	100	4	7		8		120	8	9	9	9	9	9	9	9	9	9	9	9	9	9	9
	56 B14	50	●	●	65	3.5	6			4	80	8	9	9	9	9	9	9	9	9	9	9	9	9	9	9
	63 B5	95	●	●	115	4	9		8		140	8	11	11	11	11	11	11	11	11	11	11	11	11	11	11
	63 B14	60	●	●	75	4	6		8		90	8	11	11	11	11	11	11	11	11	11	11	11	11	11	11
40/63 40/75 40/90	56 B5	80	●	●	100	4	7		8		120	9	/	/	/	/	/	/	9	9	9	9	9	9	9	9
	56 B14	50	●	●	65	3.5	6			4	80	8	/	/	/	/	/	/	9	9	9	9	9	9	9	9
	63 B5	95	●	●	115	4	9		8		140	9	11	11	11	11	11	11	11	11	11	11	11	11	11	11
	63 B14	60	●	●	75	3.5	6			4	90	8	11	11	11	11	11	11	11	11	11	11	11	11	11	11
	71 B5	110	●	●	130	4.5	9		8		160	10	14	14	14	14	14	14	14	/	/	/	/	/	/	/
	71 B14	70	●	●	85	3.5	7			4	105	8	14	14	14	14	14	14	14	/	/	/	/	/	/	/
50/75 50/90 50/110	63 B5	95	●	●	115	4	9		8		140	9	/	/	/	/	/	/	11	11	11	11	11	11	11	11
	63 B14	60	●	●	75	3.5	6			4	90	8	/	/	/	/	/	/	11	11	11	11	11	11	11	11
	71 B5	110	●	●	130	4.5	9		8		160	10	14	14	14	14	14	14	14	14	14	14	14	14	14	14
	71 B14	70	●	●	85	3.5	7			4	105	8	14	14	14	14	14	14	14	14	14	14	14	14	14	14
	80 B5	130	●	●	165	4.5	11		8		200	10	19	19	19	19	19	19	19	/	/	/	/	/	/	/
	80 B14	80	●	●	100	4	7		8		120	10	19	19	19	19	19	19	19	/	/	/	/	/	/	/
63/110	71 B5	110	●	●	130	4.5	9		8		160	10	/	/	/	/	/	/	14	14	14	14	14	14	14	14
	71 B14	70	●	●	85	3.5	7			4	105	10	/	/	/	/	/	/	14	14	14	14	14	14	14	14
	80 B5	130	●	●	165	4.5	11		8		200	10	19	19	19	19	19	19	19	19	19	19	19	19	19	19
	80 B14	80	●	●	100	4	7			4	120	10	19	19	19	19	19	19	19	19	19	19	19	19	19	19
	90 B5	130	●	●	165	4.5	11		8		200	10	24	24	24	24	24	24	24	/	/	/	/	/	/	/
	90 B14	95	●	●	115	4	8.5		8		140	10	24	24	24	24	24	24	24	/	/	/	/	/	/	/

\* Speciale

\* Special

\* Sonderausführung

N.B.: E' possibile realizzare anche tutte le composizioni ibride ottenibili dalle flange esistenti.

N.B.: it is possible to create hybrid combinations with the existing flanges.

Anmerkung: Mischkombinationen sind mit den bestehenden Flanschen möglich.



5.5 Dimensioni


5.5 Dimensions

5.5 Abmessungen



Flangia entrata / Input flange / Antriebsflansch



PM = 1



PM = 2

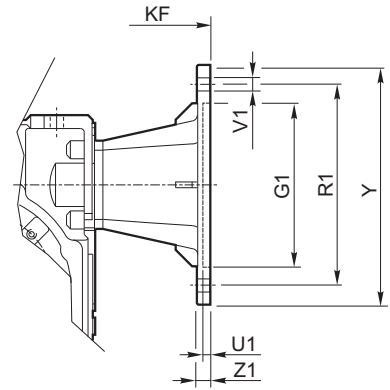

XXF	IEC	PM		G <sub>1</sub> H7	K <sub>F</sub>	R <sub>1</sub>	U <sub>1</sub>	V <sub>1</sub>			Y	Z <sub>1</sub>	
		1	2					Ø					
30/30 30/40 30/50 30/63	56 B5	•	•	80	82.5	100	3.5	7		8		120	8
	56 B14		•	50	82.5	65	3.5	6			4	80	8
	63 B5	•	•	95	85.5	115	4	9		8		140	10
	63 B14	•	•	60	85.5	75	3.5	6		8		90	8
40/63 40/75 40/90	56 B5	•	•	80	101.5	100	3.5	7		8		120	8
	63 B5	•	•	95	104.5	115	4	9		8		140	10
	63 B14	•	•	60	104.5	75	3.5	6		8		90	8
	71 B5	•	•	110	111.5	130	4.5	9		8		160	10
	71 B14	•	•	70	111.5	85	4	7		8		105	10
50/75 50/90 50/110	63 B5	•	•	95	119.5	115	4	9		8		140	10
	71 B5	•	•	110	126.5	130	4.5	9		8		160	10
	71 B14		•	70	126.5	85	3.5	7			4	105	10
	80 B5	•	•	130	136.5	165	4.5	11		8		200	10
	80 B14	•	•	80	136.5	100	4	7		8		120	10
63/110	71 B5	•	•	110	141.5	130	4.5	9		8		160	10
	80/90 B5	•	•	130	161.5	165	4.5	11		8		200	10
	80 B14	•	•	80	151.5	100	4	7		8		120	10
	90 B14	•	•	95	161.5	115	4	9		8		140	10

5.6 Limitatore di coppia cavo passante

5.6 Torque limiter with through hollow shaft

5.6 Drehmomentbegrenzer mit durchgehender Hohlwelle

XX-KX KK	N°. giri della ghiera di regolazione / N°. revolutions of ring nut / Nr. Umdrehungen der Mutter												
	1	1 1/4	1 1/2	1 3/4	2	2 1/4	2 1/2	2 3/4	3	3 1/4	3 1/2	3 3/4	4
30/30	22	27	33	38	43								
30/40	55	64	73	87									
30/50	75	97	120	157									
30/63		127	155	180	205	232	260	282					
40/63			235	265	295	327	360	407	455				
40/75			320	349	400	440	475	517	550	595	630	650	670
50/75													
40/90													
50/90													
50/110		720	815	910	1000	1100	1250						
63/110													

I valori riportati in tabella si riferiscono ai limitatori nelle versioni LS e LD (riduttore uscita).

The values listed in the table refer to torque limiters in the LS and LD versions (output gearbox).

Die in der Tabelle angegebenen Werte beziehen sich auf die LS und LD Versionen (Getriebe am Abtrieb).